



The Wyeth-Scott Company

ESTABLISHED 1906

MANUFACTURER OF THE MORE POWER PULLER®

SAFETY INSTRUCTIONS

For optimal, safe performance, follow all enclosed instructions. Always use the safety handle included with your puller.




Phone 800/743-4521 or 740/345-4528 • Email: sales@wyeth-scott.com • Hours: Mon-Fri 8:30 am - 5:00 pm ET

THIS PULLER ABSOLUTELY MUST BE KEPT GREASED!

DIRECTIONS:

- Use a grease gun with small tip or a Push 'n Lube grease gun. Lithium grease in an aerosol can with straw may be substituted.
- 9/64" grease holes are drilled in important places of the puller for your convenience. See illustration at right.
- Older pullers: if it does not have grease holes drilled, you will need to grease around these same areas.

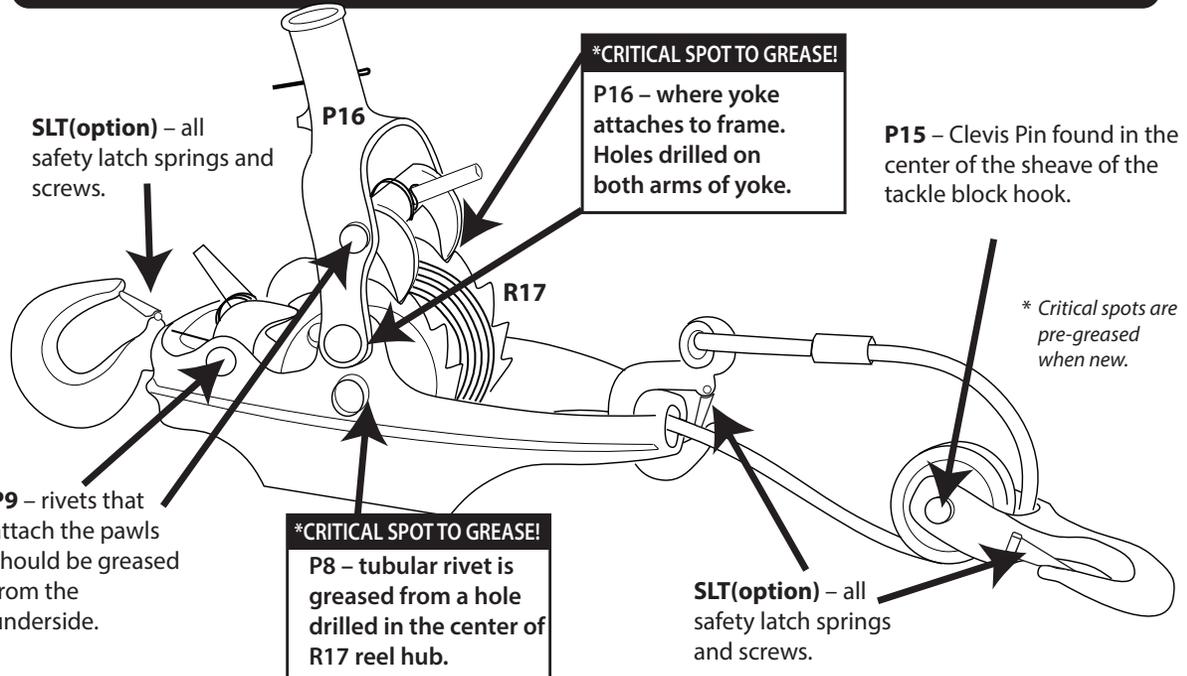

REVISED 06.25


© 2025 Wyeth-Scott Company

BE VERY CAUTIOUS RELEASING THE LOAD!!

DO NOT "FREE WHEEL" - VERY DANGEROUS - YOU MAY BREAK THE PULLER AND HURT SOMEONE!!

STEP 1

Lift up TOP PAWL LEVER and hold while you push YOKE/HANDLE forward as far as it will go (toward load). Release TOP PAWL and make sure it engages with the reel.

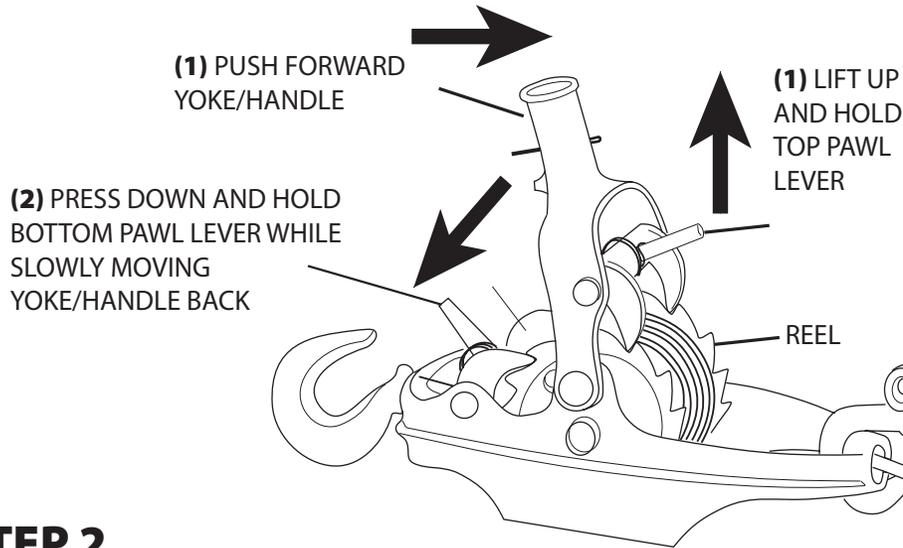

CAUTION

DO NOT "FREE WHEEL"

ONLY MOVE 1 NOTCH IN THE REEL AT A TIME FOR A HEAVY LOAD.

MOVE MAXIMUM OF 4 NOTCHES FOR LIGHT LOAD.

REPEAT THESE STEPS UNTIL TENSION IS FREE.

STEP 2

Press down and hold BOTTOM PAWL LEVER while SLOWLY moving YOKE/HANDLE back. Move 1 notch in reel for heavy loads. Maximum of 4 notches for light loads. Repeat steps until tension on the load is free.