



The Wyeth-Scott Company

ESTABLISHED 1906

MANUFACTURER OF THE MORE POWER PULLER®

85 Dayton Road • P.O. Box 888 • Newark, OH 43058-0888 • USA

Phone: 800/743-4521 or 740/345-4528 • Fax: 740/345-0123

www.wyeth-scott.com • Email: sales@wyeth-scott.com

Instructions to Remove (Cut) Cable from Reel

Check out our video of this process on YouTube

* Removing the cable is part of the cable installation videos

Please feel free to call with any questions:

800/743-4521 or 740/345-4528

Best time to call for technical assistance is Monday thru Friday 8:30 to 4:00 ET

READ ALL DIRECTIONS BEFORE STARTING

TOOLS / ITEMS NEEDED:

- Common Sense...
- Safety Glasses
- Gloves
- Drill
- 3/16" Drill Bit
- 5/16" Drill Bit
- Center Punch
- Tapered Punch - 7/16"
- Ball Peen Hammer
- Cold Chisel
- Heavy Metal Table

Note: *There are many different ways this could be done. A couple of examples are:*

- *Instead of drilling the rivet out > Use a pneumatic (air) cut off tool or pneumatic (air) die grinder*
- *Instead of cutting the cable off with a chisel > Use a pneumatic (air) cut off tool or hand held electric grinder*

Tools / Items



PULL CABLE OFF PULLER

- Attach H1 end hook to something sturdy.
- Press top pawl lever and hold down against yoke.
- Press down on yoke. Bottom pawl will release.
- Walk while holding pawls open to remove cable.
- When cable is fully extended, release pawls.

Pawls pressed down



DRILL RIVET OUT OF REEL

- On a heavy metal table, place puller on its side with the W10 frame hook facing left.
- Make sure the rivet in reel is accessible (on top).
- Center punch rivet with punch & hammer

Center punch



- In the center punch indentation, with 3/16" drill bit, drill pilot hole in rivet

3/16" Drill bit



- In pilot hole, with 5/16" drill bit, drill larger hole

5/16" Drill bit



- In 5/16" hole, take 7/16" tapered punch & ball peen hammer to drive rivet out.
 - If it doesn't come out, use the 5/16" drill bit again and drill deeper. Repeat if necessary.

Punch and ball peen hammer




Cable is removed from reel



CUT CABLE OFF

- The ferrule will not fit through the puller's frame, so you have to cut it off.
- On a heavy metal table, with chisel and ball peen hammer, cut the cable.

Cold chisel & ball peen hammer

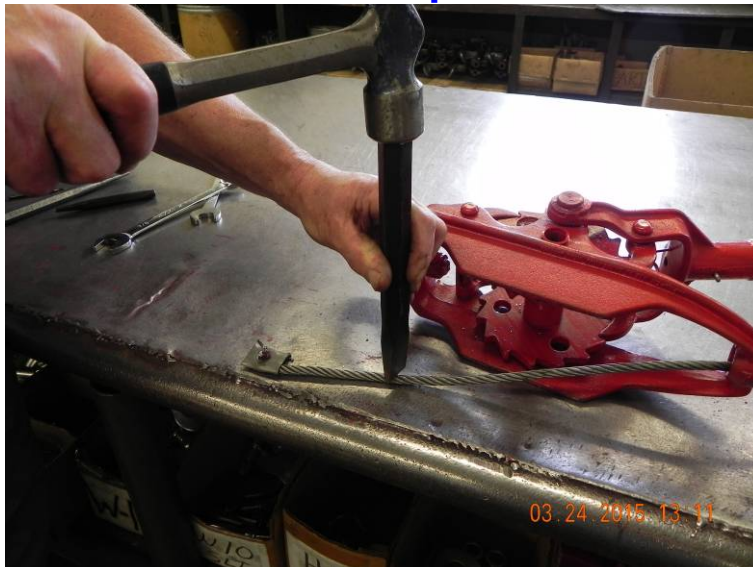

- Cable is now removed from the puller.

➤ **THESE INSTRUCTIONS ARE ONLY MEANT TO BE A BASIC GUIDE. THE WYETH-SCOTT CO. SHALL BE HELD HARMLESS FOR INJURIES RESULTING FROM IMPROPER REPAIR OF THE PULLER.** ◀